



RHPD

6/8 VITI CON SPAZIATORE 6/8 BOLT RANGE WITH SPACER



Fino a 260
Up to 260

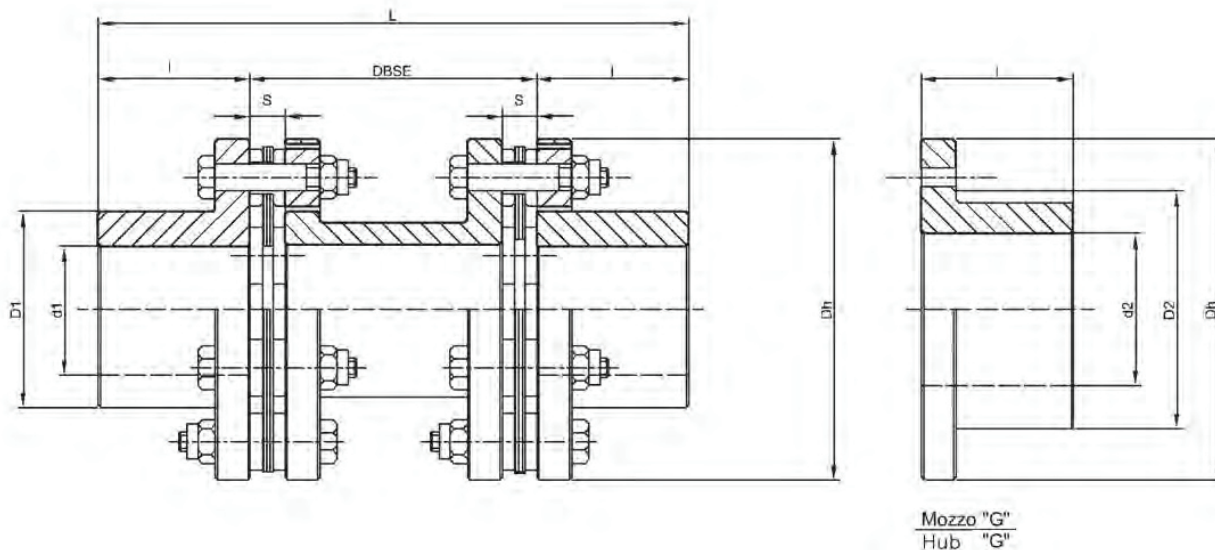

Tipo Type	Coppia nominale Nm Nominal torque Nm	N/n KW	RPM max	Fori Bores d1 max (mm)	Dh (mm)	D (mm)	L (mm)	I (mm)	DBSE (mm)	S (mm)	Peso Weight (Kg)	Momento d'inerzia Moment of inertia J (Kgm ²)	Mozzo G Hub G	
													d2 max (mm)	V (mm)
RHPD 10	157	0,0164	11000	30	78	45	136	35	66	8	1,7	0,0009	35	52
RHPD 15	235	0,0246	10800	38	90	55	146	40	66	8	3,3	0,0028	44	64
RHPD 30	470	0,0492	10600	44	110	65	169	45	79	10	5,7	0,0074	50	75
RHPD 70	1099	0,1151	10300	50	135	75	209	55	99	12	9,2	0,0168	58	88
RHPD 110	1726	0,1807	10000	62	160	92	245	62	121	13	14,7	0,0177	70	105
RHPD 170	2668	0,2794	9800	75	180	112	270	70	130	14	21	0,0650	85	125
RHPD 260	4081	0,4273	9500	90	205	130	311	90	131	15	33	0,1317	95	145
RHPD 700	6867	0,7211	8500	98	205	138	410	115	180	12	40,5	0,1531	-	-
RHPD 1000	9810	1,0272	7500	110	240	155	440	120	200	13,2	64,4	0,3627	-	-
RHPD 2010	19620	2,0544	6500	145	295	205	540	160	220	17,6	123	1,0001	-	-