


Fino a 260
Up to 260

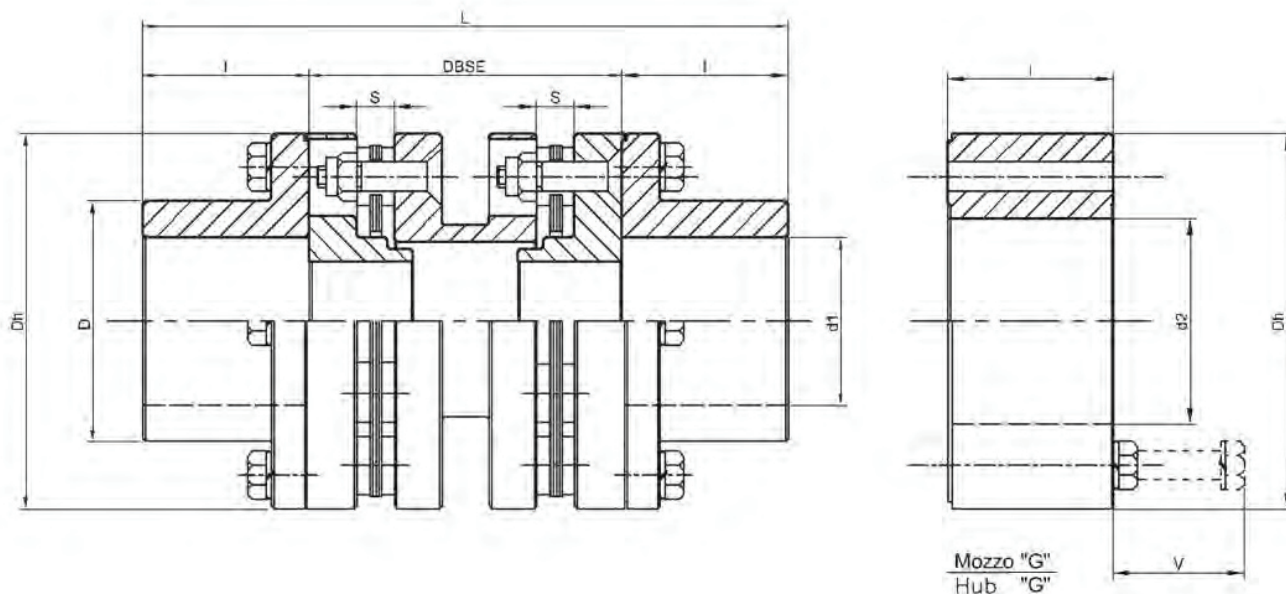

Tipo Type	Coppia nominale Nm Nominal torque Nm	N/n KW	RPM max	Fori Bores d max (mm)	Dh (mm)	D (mm)	L (mm)	I (mm)	DBSE (mm)	S (mm)	Peso Weight (Kg)	Momento d'inerzia Moment of inertia J (Kg-m ²)	Mozzo G Hub G	
													d2 max (mm)	V (mm)
RHSP 10	157	0,0164	11000	35	78	50	136	35	66	8	2,9	0,0013	48	50
RHSP 15	235	0,0246	10800	42	90	60	146	40	66	8	4,3	0,0037	55	55
RHSP 30	470	0,0492	10600	48	110	70	169	45	79	10	7,2	0,0103	75	66
RHSP 70	1099	0,1151	10300	65	135	90	209	55	99	12	13,7	0,0269	92	76
RHSP 110	1726	0,1807	10000	80	160	112	245	62	121	13	23,1	0,0642	105	88
RHSP 170	2668	0,2794	9800	94	180	132	270	70	130	14	31,3	0,1113	120	98
RHSP 260	4081	0,4273	9500	110	205	155	311	90	131	15	49,3	0,2278	140	116
RHSP 700	6867	0,7211	8500	114	205	160	410	115	180	12	56,9	0,2427	140	140
RHSP 1000	9810	1,0272	7500	130	240	185	440	120	200	13,2	86,8	0,5309	165	152
RHSP 2010	19620	2,0544	6500	155	295	220	540	160	220	17,6	152	1,3259	210	192