


Fino a 260  
Up to 260

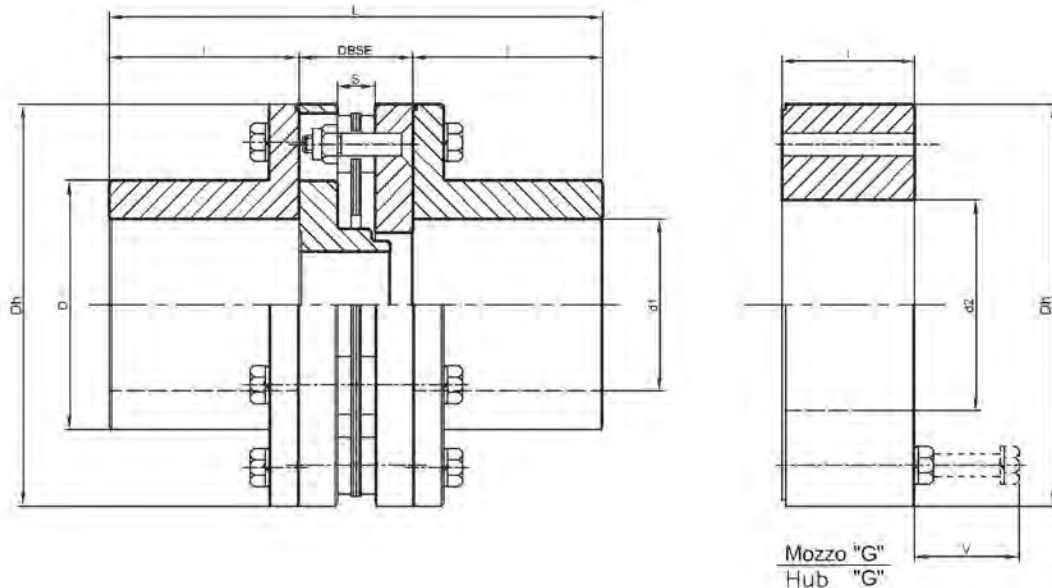

Tipo Type	Coppia nominale Nm Nominal torque Nm	N/n KW	RPM max	Fori Bores d max (mm)	Dh (mm)	D (mm)	L (mm)	I (mm)	DBSE (mm)	S (mm)	Peso Weight (Kg)	Momento d'inertzia Moment of inertia J (Kgm <sup>2</sup> )	Mozzo G Hub G	
													d2 max (mm)	D2 (mm)
RHPA 10	157	0,0164	11000	35	78	50	98	35	28	8	2,5	0,0019	48	50
RHPA 15	235	0,0246	10800	42	90	60	108	40	28	8	3	0,0026	55	55
RHPA 30	470	0,0492	10600	48	110	70	124	45	34	10	4,6	0,0068	75	66
RHPA 70	1099	0,1151	10300	65	135	90	150	55	40	12	8,7	0,0181	92	76
RHPA 110	1726	0,1807	10000	80	160	112	171	62	47	13	12,8	0,0365	105	88
RHPA 170	2668	0,2794	9800	94	180	132	188	70	48	14	20,2	0,0752	120	98
RHPA 260	4081	0,4273	9500	110	205	155	231	90	51	15	37,8	0,1546	140	116
RHPA 700	6867	0,7211	8500	114	205	160	277	115	47	12	46,8	0,1882	110	140
RHPA 1000	9810	1,0272	7500	130	240	185	298	120	58	13,2	70,5	0,4039	165	152
RHPA 2010	19620	2,0544	6500	155	295	220	380	160	60	17,6	125,8	1,0144	210	192